

DROP® P4

PROFESSIONAL OUTDOOR UPLIGHT



FEATURES

- ▶ 4 x 15 W RGBWAUV LEDs
- ▶ Built-in 2.4 GHz W-DMX™ receiver
- ▶ 16-bit technology for high-resolution colours and dimming
- ▶ Power supply via mains cable
- ▶ Security lock prevents unauthorised menu access
- ▶ W-DMX and infrared control or operation via OLED display
- ▶ 2 diffusers for flexible beam angle: 22°, 32° or 45°

DESCRIPTION

Flexibility meets design! Professionals and rental firms are better prepared with this uplight! Whether they're standing, hanging or mounted in some other way, our DROP series uplights always look good. This is thanks to their intelligently attached bracket with no visible screws. The innovative bracket is screwed onto the uplight from below and not from the side as is standard. This means that when unmounted, the lamp boasts a very clean, simple exterior.

Mounting options are flexible, either on the bracket or standing on rubber feet. When positioned upright and standing (without the mounted bracket), a built-in adjustment screw is available for tilt manipulation. Rated with protection class IP65, this uplight is also suitable for outdoor use.



Features and specifications
subject to change without notice.





adamhall.com

DROP® P4

PROFESSIONAL OUTDOOR UPLIGHT



PHOTOMETRICAL DATA

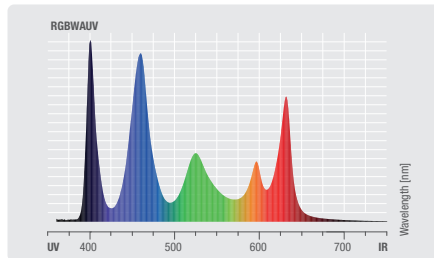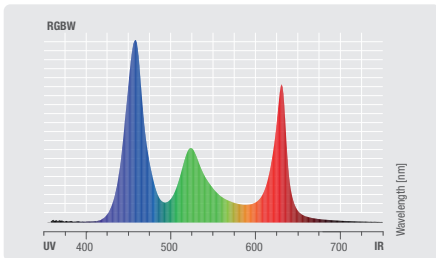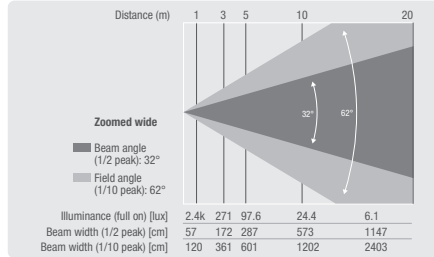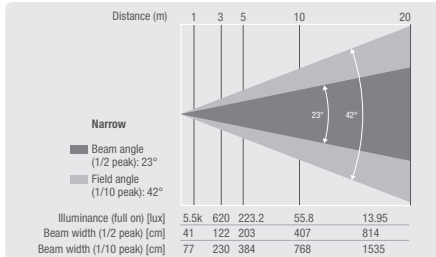

SPECIFICATIONS

Product type	LED Wash Light
Type	Outdoor PAR
Colour spectrum	RGBWA + UV
Number of LEDs	4
LED type	15 W
Dispersion	22 °, 32 °, 40 °
DMX input	XLR 3-pin female
DMX output	XLR 3-Pol male IP65
DMX Functions	colour change, colour fade, colour macro, Colour temperature correction, Dimmer, Dimmer Curve, Dimmer Fine, Dimmer response, LED PWM Frequency, RGBWA + UV, RGBWA + UV Fine, strobe
Standalone modes	Auto programs, colour macro, Colour Mix, Master / Slave mode, strobe, Tunable White, User Colours
Control	DMX, RDM
Controls	Down, Enter, Mode, Up
Indicators	OLED Display
Power consumption	45 W
Power connector	Neutrik PowerCON TRUE1 IN / OUT
Housing material	Metal
Cabinet colour	Black
Protection class IP	IP65
Relative Humidity	< 85 %, not condensing
Cooling	Convection
Luminous flux	1400 lm
Maximum Ambient Temperature	0 - 40 °C
Dimensions including Mounting Bracket	
Width	247.9 mm
Height	236.8 mm
Certification	CE, ETL, FCC, RoHS
Diameter	171.7 mm
Weight	3.1 kg
Accessories (included)	1 x Mounting bracket, 2 x filter, Neutrik PowerCon

DROP® P4

PROFESSIONAL OUTDOOR UPLIGHT



DIMENSIONS (mm)

